


SPRING HANGER ISOLATOR



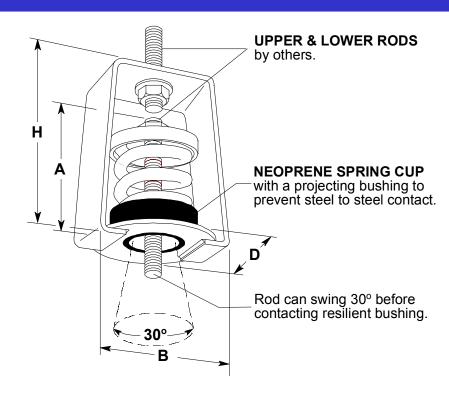

DESCRIPTION

- The spring coil of vibration isolator are made by helical steel spring and powder coated for corrosion prevention and life extension.
- Spring hanger prevents vibration generated from suspended equipments.
- Spring seat is attatched to upper and lower parts to support the weak point of the spring with high frequency transmission resulting from surging effect.

APPLICATION

- Vibration-proofing for axial, in-line fans, fan coil unit.
- For suspended ceiling deck systems in studios, sound labs and sound measuring rooms.

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (Kg)	Deflection (mm)	Spring constant (Kgf/mm)	Color	Dimension (mm)				
					Ξ	Α	В	D	Hanging Bolt
VH-A-10	3-10	20	0.5	Pink	110	70	70	60	
VH-A-25	15-25	20	1.25	Yellow	110	70	70	60	
VH-A-50	30-50	20	2.5	Red	110	70	70	60	M10
VH-A-75	55-75	20	3.3	Black	110	70	70	60	
VH-A-100	80-100	20	5.0	Blue	110	70	70	60	
VH-B-150	110-150	20	7.5	Brown	170	100	96	79	
VH-B-200	160-200	20	10.0	White	170	100	96	79	M12
VH-B-300	220-300	20	15.0	Organe	170	100	96	79	
VH-B-400	320-400	20	20.0	Pink	170	100	96	79	



SEOUL OFFICE

1601-1, SEOCHO-DONG, SEOCH-GU, SEOUL, KOREA

TEL: +82 2 598 1988 FAX: +82 2 598 1989 Website: <u>www.nsv.co.kr</u>; Email: overseas@nsv.co.kr





